



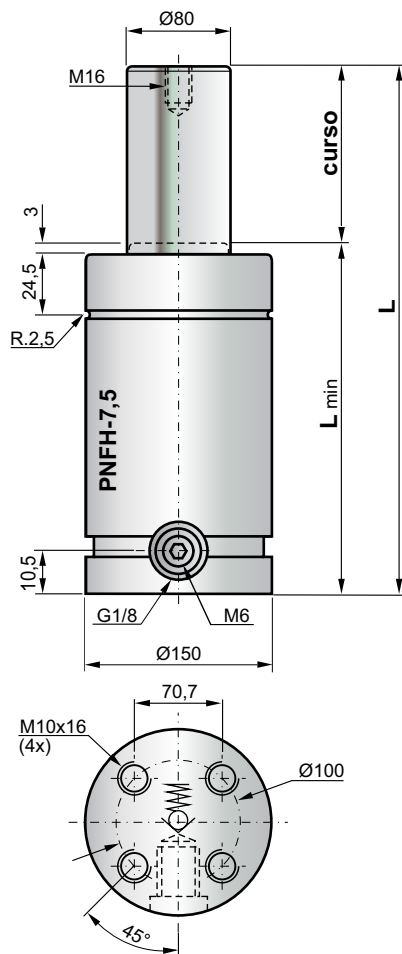


Código	Curso Cilindro (mm)	Força da N Pressão à 150bar Inicial	Força da N Pressão à 150bar Final*	L K=155 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg	ISO
PNFH-7,5-015	15	7.539	10.799	185	170	249,7	20.897	
PNFH-7,5-020	20	7.539	11.138	195	175	311,1	21.305	
PNFH-7,5-025	25	7.539	11.378	205	180	372,5	21.714	✓
PNFH-7,5-032	32	7.539	11.615	219	187	458,4	22.288	
PNFH-7,5-038	38	7.539	11.762	231	193	532,0	22.778	
PNFH-7,5-050	50	7.539	11.967	255	205	679,3	23.761	✓
PNFH-7,5-063	63	7.539	12.112	281	218	838,8	24.825	
PNFH-7,5-075	75	7.539	12.206	305	230	986,1	25.807	
PNFH-7,5-080	80	7.539	12.238	315	235	1.047,4	26.217	✓
PNFH-7,5-100	100	7.539	12.335	355	255	1.292,9	27.853	✓
PNFH-7,5-125	125	7.539	12.416	405	280	1.599,6	29.899	✓
PNFH-7,5-160	160	7.539	12.490	475	315	2.029,2	32.764	✓
PNFH-7,5-200	200	7.539	12.543	555	355	2.520,0	36.038	✓
PNFH-7,5-250	250	7.539	12.587	655	405	3.133,6	41.130	✓
PNFH-7,5-300	300	7.539	12.617	755	455	3.747,2	44.222	✓


* Força Final Isotérmica a 20°C, curso totalmente atuado.

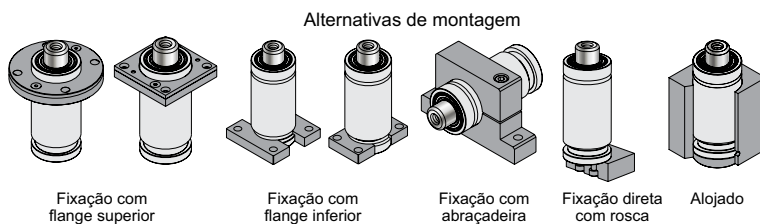


PNB-54-150

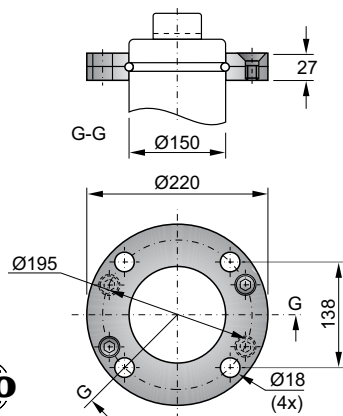


PNB-65-150

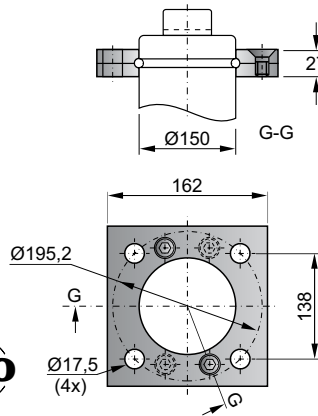


PNB-55-150

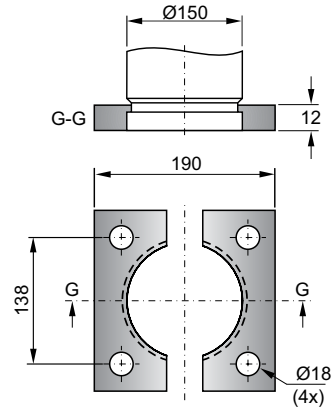


PNB-32-150

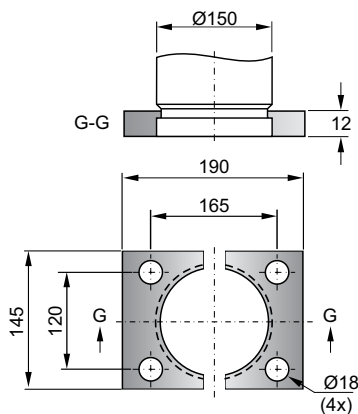

PNB-57-150

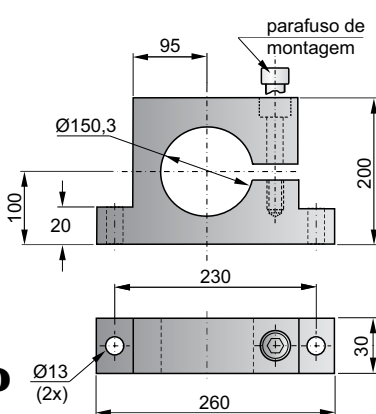

PNB-56-150

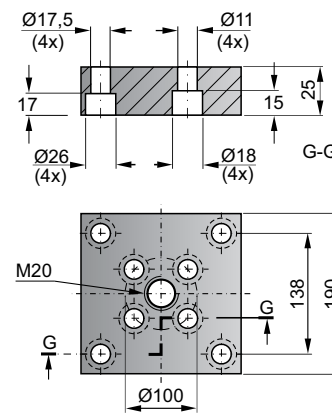

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.