



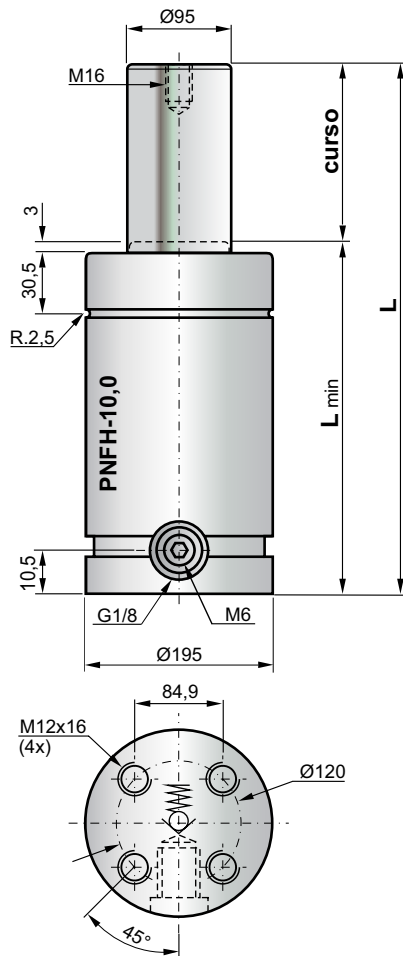


Código	Curso Cilindro (mm)	Força daN Pressão à 150bar		L K=160 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg	ISO
		Inicial	Final*					
PNFH-10,0-020	20	10.632	14.445	200	180	537,0	31.267	
PNFH-10,0-025	25	10.632	14.724	210	185	637,5	31.928	✓
PNFH-10,0-032	32	10.632	15.005	224	192	778,3	32.853	
PNFH-10,0-038	38	10.632	15.181	236	198	898,9	33.647	
PNFH-10,0-050	50	10.632	15.427	260	210	1.140,2	35.234	✓
PNFH-10,0-063	63	10.632	15.603	286	223	1.401,6	36.953	
PNFH-10,0-075	75	10.632	15.718	310	235	1.642,8	38.540	
PNFH-10,0-080	80	10.632	15.757	320	240	1.743,4	39.201	✓
PNFH-10,0-100	100	10.632	15.877	360	260	2.145,5	41.846	✓
PNFH-10,0-125	125	10.632	15.978	410	285	2.648,1	45.152	✓
PNFH-10,0-160	160	10.632	16.069	480	320	3.351,9	49.781	✓
PNFH-10,0-200	200	10.632	16.136	560	360	4.156,1	55.071	✓
PNFH-10,0-250	250	10.632	16.191	660	410	5.161,4	61.683	✓
PNFH-10,0-300	300	10.632	16.228	760	460	6.166,7	68.296	✓

* Força Final Isotérmica a 20°C, curso totalmente atuado.


Alternativas de montagem

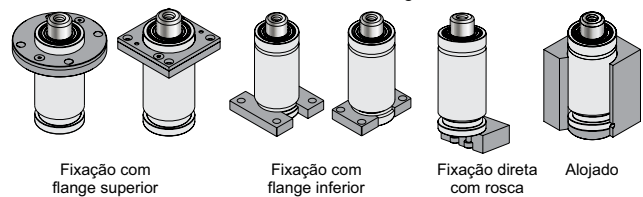


PNB-54-195

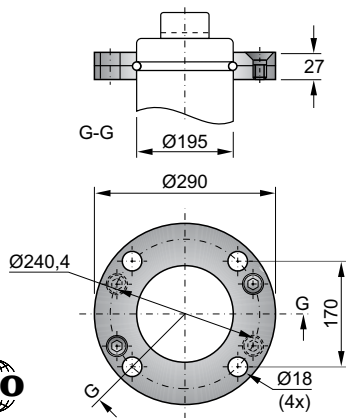


PNB-65-195

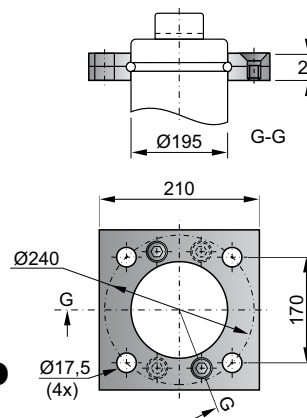


PNB-55-195

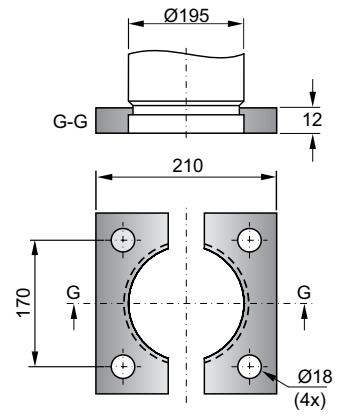

PNB-32-195

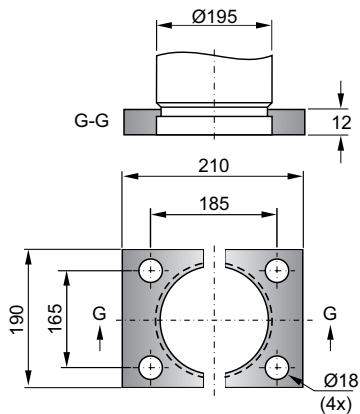

PNB-56-195

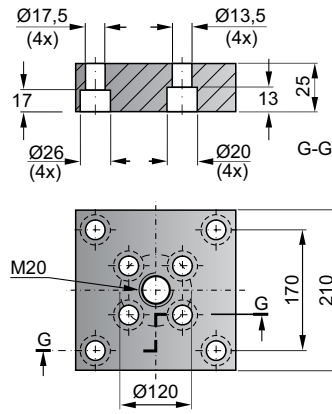

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.