
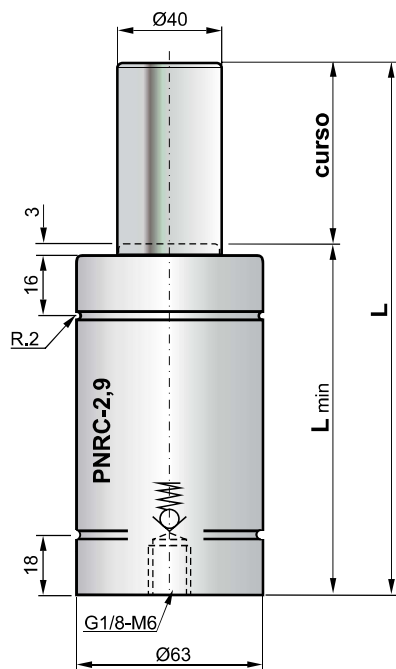



Código	Curso Cilindro (mm)	Força daN Pressão à 150bar		L (mm)	L min. (mm)	Vol. inicial (cm³)	Kg
PNRC-2,9-010	10	3.266	4.715	85	75	52,3	1.335
PNRC-2,9-015	15	3.266	4.875	100	85	74,3	1.457
PNRC-2,9-020	20	3.266	4.966	115	95	96,4	1.576
PNRC-2,9-025	25	3.266	5.025	130	105	118,5	1.697
PNRC-2,9-032	32	3.266	5.130	150	118	147,5	1.857
PNRC-2,9-038	38	3.266	5.155	168	130	174,0	2.012
PNRC-2,9-050	50	3.266	5.155	205	155	229,0	2.295

* Força Final Isotérmica a 20°C, curso totalmente atuado.

Alternativas de montagem

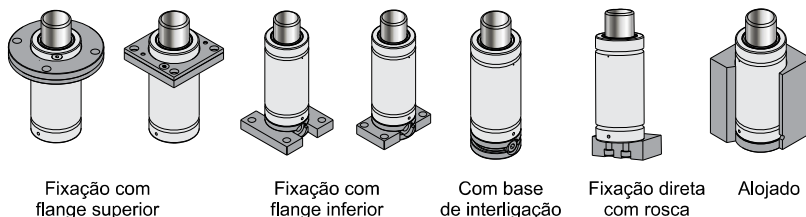


PNB-100-063 - Base de Interligação

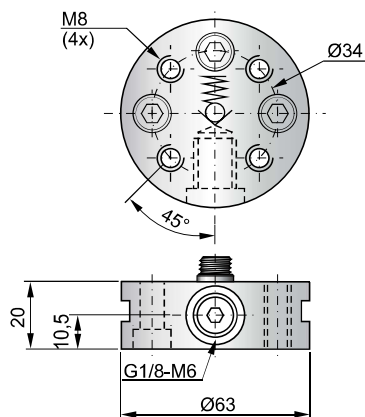


Acompanha adaptador de interligação G1/8 x M6x1
O cilindro também poderá trabalhar de forma autônoma


PNB-54-063

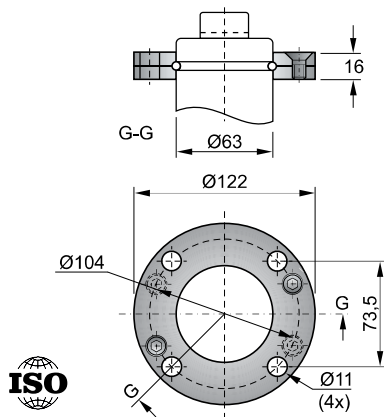

PNB-65-063-ISO

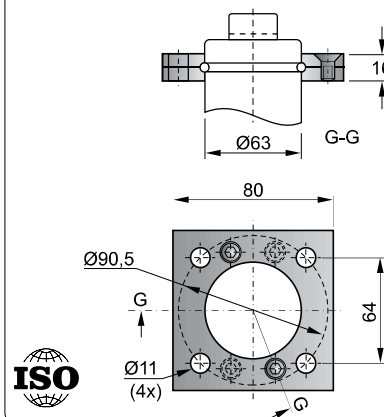

PNB-65-063

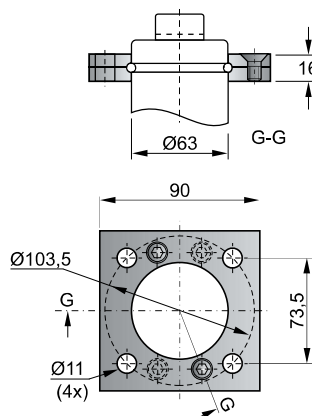

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.