

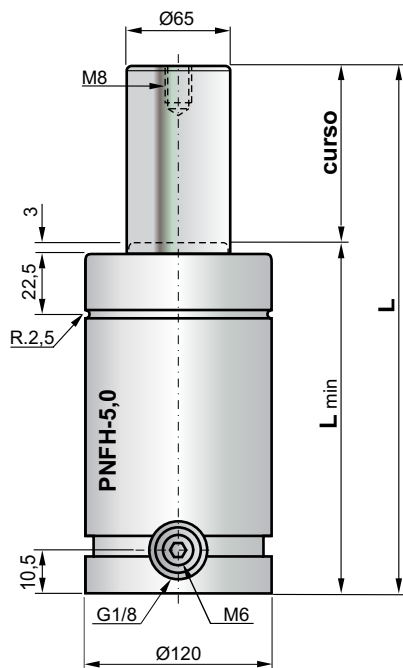


Código	Curso Cilindro (mm)	Força daN Pressão à 150bar		L K=140 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg	ISO
		Inicial	Final*					
PNFH-5,0-015	15	4.977	6.845	170	155	182,3	11.858	
PNFH-5,0-020	20	4.977	7.104	180	160	221,6	12.124	
PNFH-5,0-025	25	4.977	7.297	190	165	260,9	12.390	✓
PNFH-5,0-032	32	4.977	7.497	204	172	315,9	12.762	
PNFH-5,0-038	38	4.977	7.624	216	178	363,0	13.081	
PNFH-5,0-050	50	4.977	7.811	240	190	457,2	13.720	✓
PNFH-5,0-063	63	4.977	7.947	266	203	559,3	14.410	
PNFH-5,0-075	75	4.977	8.037	290	215	653,6	15.049	
PNFH-5,0-080	80	4.977	8.068	300	220	692,8	15.315	✓
PNFH-5,0-100	100	4.977	8.165	340	240	849,9	16.378	✓
PNFH-5,0-125	125	4.977	8.246	390	265	1.046,3	17.707	✓
PNFH-5,0-160	160	4.977	8.321	460	300	1.321,2	19.569	✓
PNFH-5,0-200	200	4.977	8.376	540	340	1.635,3	21.696	✓
PNFH-5,0-250	250	4.977	8.422	640	390	2.028,0	24.354	✓
PNFH-5,0-300	300	4.977	8.453	740	440	2.420,7	27.014	✓


* Força Final Isotérmica a 20°C, curso totalmente atuado.

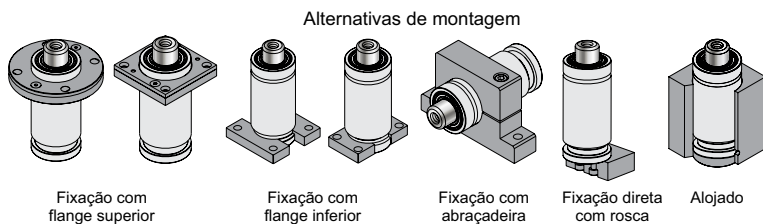


PNB-54-120

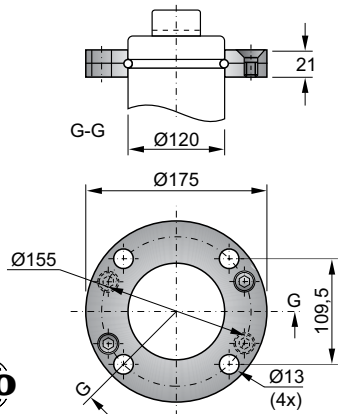


PNB-65-120

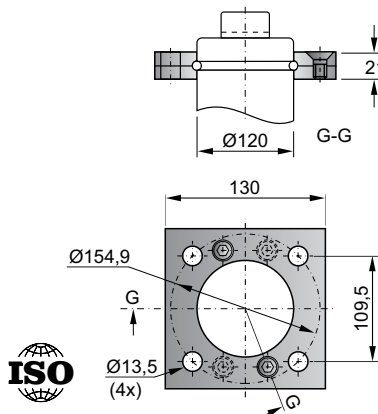


PNB-55-120

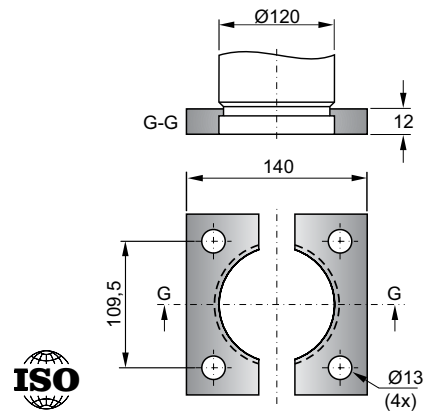


PNB-32-120

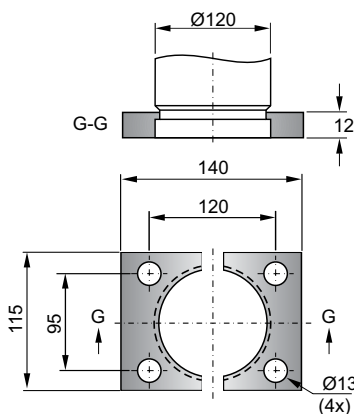

PNB-57-120

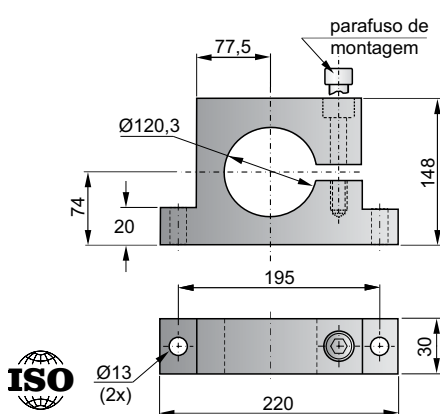

PNB-56-120

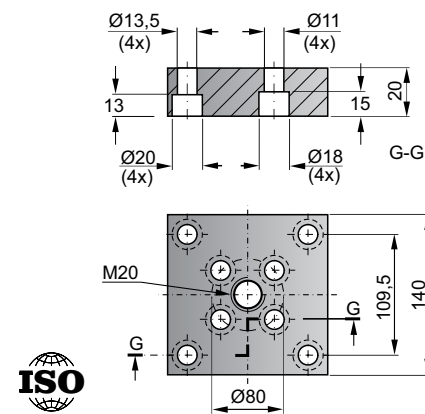

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.